

g8 w œ g8 G:GwGG ") GpGFGsGŠGy


# 550W+

7GZ—

Z—→)

# 21.0%

7G!õ®p

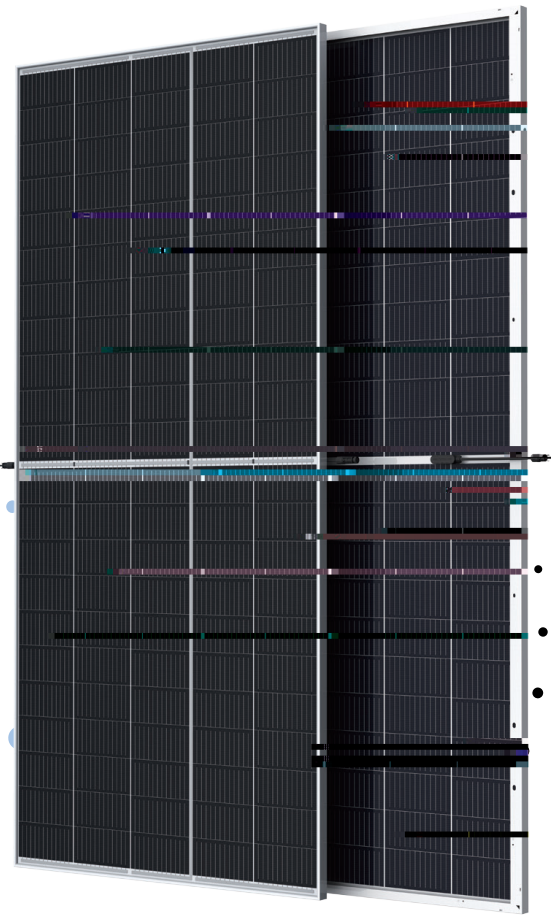

- -\$0& És=C?jA #04 \*%;+µÄ w\_nt" d¿s)8 wyV
- HR¼qz±`sâSt|&â¼=p>Q>²Í
- HR¼qz±`ôZ—~ô®pt'"ôMd¿®p>îq
- çb^•oM"aj\*%;+qw&ùQ~ÝA



- ôµSî÷U[w>;t"7G wP'á"ç!õ®p>îq
- ÿ Ä~ô!«~ô®p=>îqb"Úç½ìµ"U[ªjeL



### ôTQw²Í


- ¼Ý"´èµ§¿Äÿî-U[ /PO%FTUSVDUJWF\$VUUJQH w
- «é«â¿«wC\7=-
- ô¼íP'á"çP%w~ k`M·ça Óé·µgt""
- 11\*% ç?y IZ—¼=£~
- •zžīPÇžz-zô9t|ôêS•~w'Osk`M ¥pw1Q
- 1YO•Yy 1Bçuz¿é£ÚyYO 1B jøçé£Qó




### ôMC?"

vH~ ¼g; p~Ý^•h •h\*". Öù~!É¼ qÿ°S>Q  
 vèwè¹>ÿnb"«âµ»síf->>;  
 vHR¼"ÿM9S : — q^9S>îq  
 v"Z—w 7G ž¿ÓU84pV"†ØC?·ç>;PÃç  
 çC?ÿC"xjØÖù«"•f" ¥t' £

ÄæÆK¹"â"7&35&9 †Ø!«†Ø"âµwZ--Ä

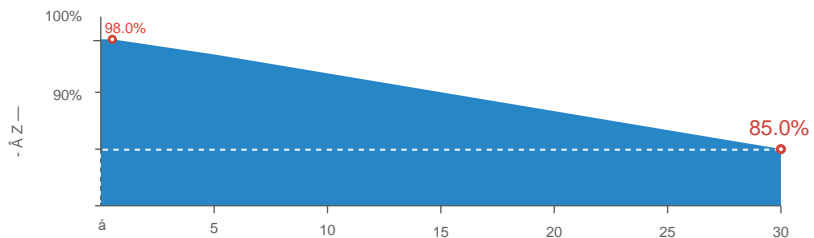

\*&\$ \* &\$ \* &\$ \* &\$ 6-  
 \*40 ¼iÜÉ'ÝiÄ \*9è  
 \*40 ¥ÜÉ'ÝiÄ³µÄÜ\*40  
 ®L~µLZU\*  
 \*40 Ñ††¶ò\ÜÉ'ÝiÄ³µÄÜ

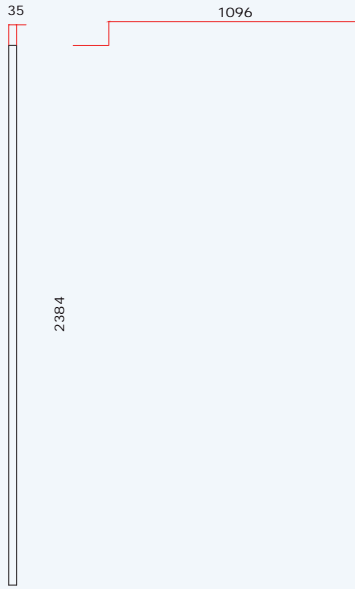

/8W

/8W

W)

7 V (A)

(W)

STC (標準試験条件): 日射強度 1000W/m<sup>2</sup>, セル温度 25℃, AM1.5. \*: 測定公差 ± 3%.

Power Bifaciality: 70~5%.

MC4 EVO2 / TS4\*

\*Please refer to regional datasheet for specified connector.

43°C (-2°C)  
- 0.34%/°C  
- 0.25%/°C  
0.04%/°C

-40~+85°C  
1500V DC (IEC)  
1500V DC (UL)  
35A